

2.4GHz Active RFID Panel Antenna

Model: HKRAA-2417






**Panel
Antenna**

2.4GHz Active RFID Panel Antenna
Model: HKRAA-2417

Specification for Active Panel Antenna HKRAA-2417:

Electrical Specification	
Frequency Range	2400-2500MHz
VSWR	≤ 1.5
Input Impedance	50Ω
Gain	17dBi
Polarization Type	Vertical or Horizontal
Horizontal Plane Θ_{HP}	$20 \pm 2^\circ$
Vertical Plane Θ_{HP}	$20 \pm 2^\circ$
Front to Back Ratio	≥ 26dB
Maximum Input Power	6W
Connector Type	N -Female
Lightning Protection	DC ground
Mechanical Specifications	
Dimension	305mm × 305mm × 25mm
Weight	1.5Kg
Rated Wind Velocity	210km/h
Radome material	UV-Resistance ABS
Working Temperature	-40~60°C

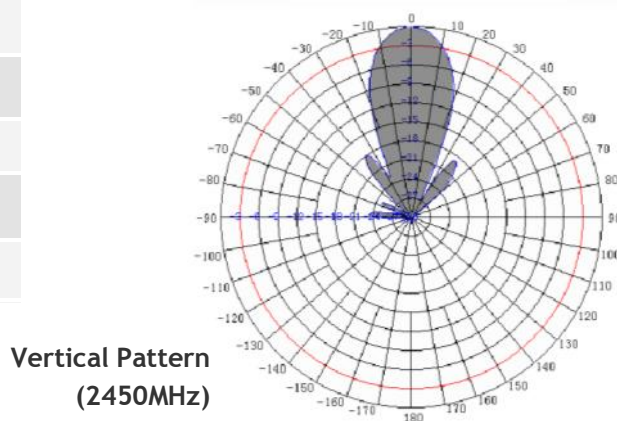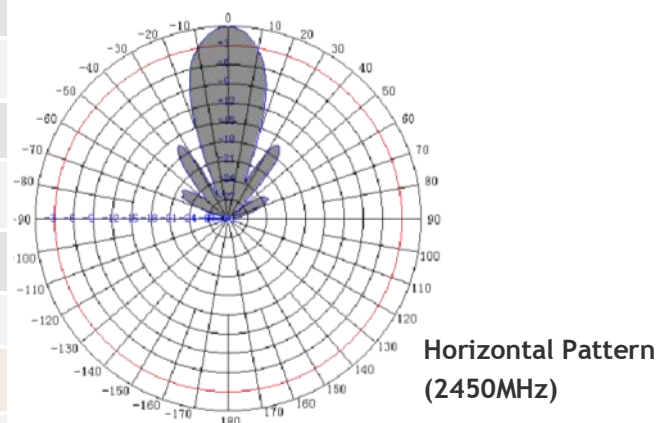

科技成就優異證書
TECHNOLOGICAL
ACHIEVEMENT
CERTIFICATE OF MERIT

For enquiry, please contact:

Email: sales@hk-rfid.com

Tel: +852 2165 4708 Fax: +852 3007 1901